


**T.D. TAICHEE**  
**TXW-286**



Engineering Information	技术参数	TXW-286
Drivers	单元组成	LF:2 × 18" Voice-coil:4"
Frequency(+/-3dB)	频率响应(+/-3dB)	30-220Hz
Dispersion(-6dB)	覆盖角度(-6dB)	
Sensitivity(1m/1W)	灵敏度 (1m/1W)	99dB
maximum SPL	输出声压级	130dB continuous/136dB peak
Nominal Impedance	额定阻抗	4 Ohms
Rated Power	功率	1200W AES / 4800W peak
Recommended AMP	推荐放大器功率	1800W/4 Ohms
Crossover Frequency	分频点	≤120Hz
Connectors	输入连接器	2 × Speakon NL4MP
Dimensions(H × W × D)	净尺寸(H × W × D)	557mm × 1062mm × 780mm
Packing Dimensions(H × W × D)	包装尺寸(H × W × D)	1147mm × 879mm × 656mm
Net Weight(KG)	净重量 (KG)	85
Gross Weight(KG)	包装总重量 (KG)	97
<b>Construction</b>	<b>结构特点</b>	
Physical	箱体外形	矩形
Enclosure Material	箱体材料	桦木夹板
Enclosure Material	箱体面网	模压钢制圆形孔网面, 外加黑色海绵
Finish	表面漆	紫色环保水性耐磨油漆涂装 (可按客户要求定制颜色)
Handing Position	吊装点	16个M10螺丝吊装孔位
Pole Mount	支撑座	
Caster	运输轮	
Applications	适用范围	礼堂, 会议室, 音乐酒吧, DISCO酒吧, KTV房间
<b>Construction Drawing</b>	<b>结构示意图</b>	

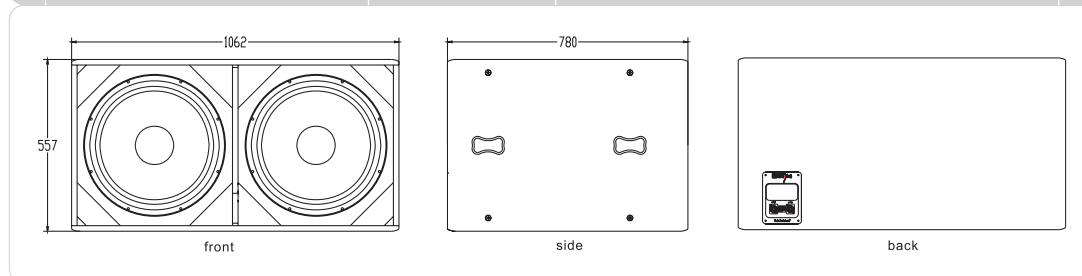

T.D. TAICHEE Professional Audio System